



Item no: VGS™2010\_FC25P

## VGS™2010 FC25P

Piab VGS™ – A product design where different suction cups are integrated with vacuum cartridges based on the patented COAX® technology. The “vacuum gripper” makes selection, sizing and installation of a vacuum system easier. With a VGS™ you will enjoy the benefits of a more cost-efficient and reliable... decentralized vacuum system.

- Patented COAX® technology.
- Suitable for lifting small objects and narrow parts as well as also slightly domed surfaces.
- Thanks to good friction of the rubber material the cups can withstand high shear forces at rapid acceleration.
- The suction cups have cleats that prevent thin objects from being disfigured.
- Available with a two-stage COAX® cartridge MICRO. Configurable to your specific needs. Choose Bi for low feed pressure, Si for high vacuum flow, Xi for extra vacuum and Ti at 0.4/0.6 MPa for extra capacity/dirt tolerance..

### General

|                         |                          |
|-------------------------|--------------------------|
| Material                | TPE, PU, PA, SS, AL, NBR |
| Noise level             | 55 - 61 dBA              |
| Temperature             | 10 - 50 °C               |
| Weight                  | 24 - 35 g                |
| Suction cup model       | FC25P                    |
| Movement, vertical max. | 3.7 mm                   |
| Curve radius, min.      | 45 mm                    |

### Performance

|                     |         |
|---------------------|---------|
| Feed pressure, max. | 0.7 MPa |
|---------------------|---------|

Performance - lifting forces


|         | FC25P |  |  |
|---------|-------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 20 -kPa |       | 8 N                                                                               | 9 N                                                                                |
| 60 -kPa |       | 20 N                                                                              | 12 N                                                                               |
| 90 -kPa |       | 27 N                                                                              | 18 N                                                                               |

| Feed pressure            | Air consumption | Vacuum flow (NI/s) at different vacuum levels (-kPa) |      |       |       |       |       |       |       |       |      | Max vacuum |
|--------------------------|-----------------|------------------------------------------------------|------|-------|-------|-------|-------|-------|-------|-------|------|------------|
| MPa                      | NI/s            | 0                                                    | 10   | 20    | 30    | 40    | 50    | 60    | 70    | 80    | -kPa |            |
| MICRO Bi03-2 0,18 - 0.18 | 0.14            | 0.23                                                 | 0.15 | 0.06  | 0.04  | 0.035 | 0.023 | 0.013 | 0.006 | 0     | 83   |            |
| MICRO Si02-2 0,6 - 0.6   | 0.12            | 0.28                                                 | 0.21 | 0.12  | 0.08  | 0.07  | 0.06  | 0.04  | 0.02  | 0     | 75   |            |
| MICRO Xi2.5-2 0,50 - 0.5 | 0.13            | 0.233                                                | 0.15 | 0.079 | 0.044 | 0.036 | 0.03  | 0.023 | 0.013 | 0.007 | 91   |            |
| MICRO Ti05-2 0,4 - 0.45  | 0.29            | 0.35                                                 | 0.31 | 0.25  | 0.18  | 0.11  | 0.08  | 0.06  | 0.03  | 0.007 | 84   |            |
| MICRO Ti05-2 0,6 - 0.6   | 0.37            | 0.34                                                 | 0.3  | 0.26  | 0.21  | 0.16  | 0.1   | 0.048 | 0.023 | 0     | 79   |            |

| Feed pressure            | Air consumption | Evacuation time (s/l) to reach different vacuum levels (-kPa) |      |       |      |      |       |       |       |    |      | Max vacuum |
|--------------------------|-----------------|---------------------------------------------------------------|------|-------|------|------|-------|-------|-------|----|------|------------|
| MPa                      | NI/s            | 10                                                            | 20   | 30    | 40   | 50   | 60    | 70    | 80    | 90 | -kPa |            |
| MICRO Bi03-2 0,18 - 0.18 | 0.14            | 0.5                                                           | 1.4  | 3.9   | 6.4  | 10   | 16    | 28    | 51    | 0  | 83   |            |
| MICRO Si02-2 0,6 - 0.6   | 0.12            | 0.41                                                          | 1.01 | 2.01  | 3.3  | 4.9  | 6.9   | 10.2  | 0     | 0  | 75   |            |
| MICRO Xi2.5-2 0,50 - 0.5 | 0.13            | 0.52                                                          | 1.39 | 3.01  | 5.51 | 8.56 | 12.32 | 17.77 | 27.48 | 0  | 91   |            |
| MICRO Ti05-2 0,4 - 0.45  | 0.29            | 0.3                                                           | 0.66 | 1.12  | 1.8  | 2.85 | 4.35  | 6.55  | 11.5  | 0  | 84   |            |
| MICRO Ti05-2 0,6 - 0.6   | 0.37            | 0.31                                                          | 0.67 | 1.089 | 1.63 | 2.39 | 3.7   | 6.54  | 0     | 0  | 79   |            |

| Feed pressure          | Air consumption | Blow flow (NI/s) at different pressure levels (-kPa) |      |      |      |     |      |      |      |    |      | Max vacuum |
|------------------------|-----------------|------------------------------------------------------|------|------|------|-----|------|------|------|----|------|------------|
| MPa                    | NI/s            | 10                                                   | 20   | 30   | 40   | 50  | 60   | 70   | 80   | 90 | -kPa |            |
| MICRO Si02-2 0,6 - 0.6 | 0.12            | 0.4                                                  | 0.34 | 0.22 | 0.21 | 0.2 | 0.18 | 0.17 | 0.15 | 0  | 75   |            |

Dimensional drawings 

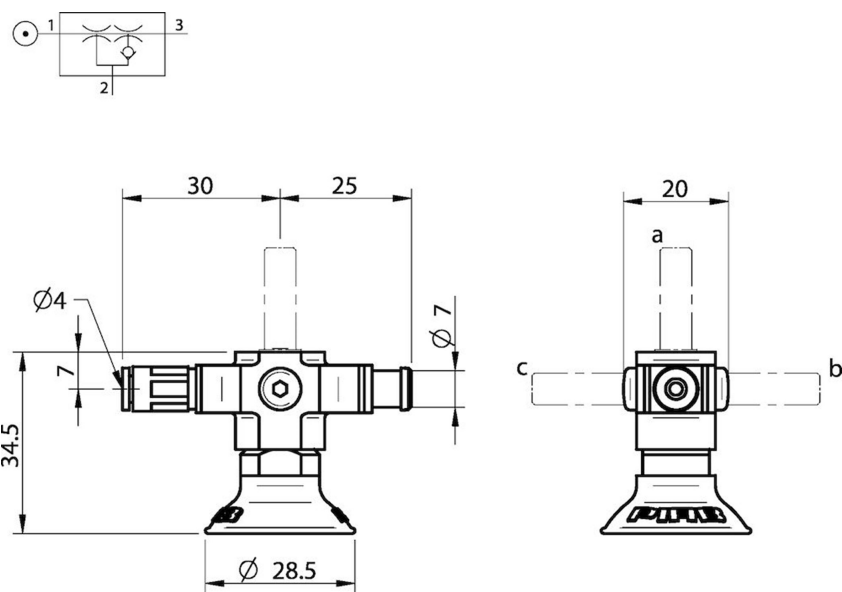

Values specified in the data sheet are tested at:

- Room temperature: (20° C [68° F] ± 3° C [5.5° F])
  - Standard atmosphere: (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg])
  - Relative humidity: 0-100%
  - Compressed air quality: DIN ISO 8573-1 class 4
-