


ACCESSORIES FOR STAINLESS STEEL CYLINDERS SERIES 97



Foot mount Mod. B



Trunnion bracket Mod. I



Rear female trunnion bracket Mod. C-H



Tight rear female tr. bracket Mod. CR



Male tr. bracket with swivel ball joint Mod. R



90° male tr. bracket + sw. ball joint Mod. ZCR



Rod fork end Mod. G-90



Swivel ball joint Mod. GA-90



Piston rod lock nut Mod. U-90



Nose nut Mod. V-97



Clevis pin Mod. S-90



Anti-rotation clevis pin Mod. SR-90




All accessories are supplied separately, except for piston rod lock nut Mod. U and nose nut Mod. V.

Foot mount Mod. B



Material: stainless steel 304

Supplied with:
1x nut
2x single feet

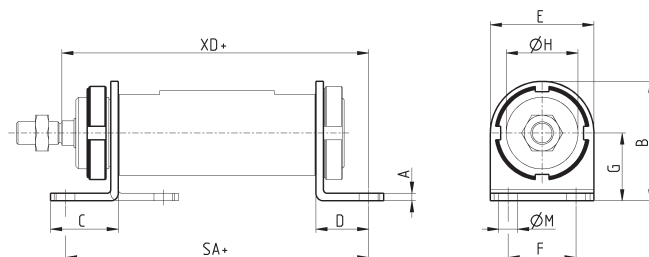

+ = add the stroke


DIMENSIONS												
Mod.	Ø	A	B	C	D	E	SA+	F	G	ØH	ØM	XD+
B-97-32	32	4	53	35	24	42	142	32	32	30	7	142
B-97-40	40	4	63.5	36	28	55	161	36	36	38	10	160
B-97-50	50	5	77.5	47	32	65	170	45	45	45	10	170
B-97-63	63	5	82.5	45	32	65	185	50	50	45	10	190

Trunnion bracket Mod. I



Material: stainless steel 304


Supplied with:
1x female trunnion
2x cartridges

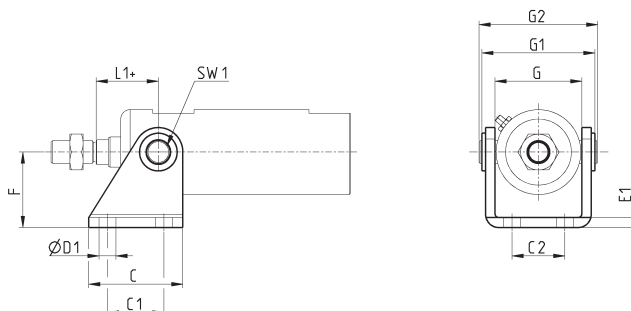

+ = add the stroke


DIMENSIONS												
Mod.	Ø	C	C1	C2	ØD1	E1	F	G	G1	G2	L1+	SW1
I-97-32	32	40	24	20	7	4	35	38	50	58	27	8
I-97-40	40	50	30	28	9	5	40	46	60	71	33	8
I-97-50	50	54	34	36	9	6	45	57	74	81	40	8
I-97-63	63	65	35	43	9	6	50	70	88	104	45	12

Rear female trunnion bracket Mod. C-H



Material: stainless steel 316

Supplied with:
1x female trunnion bracket
4x screws

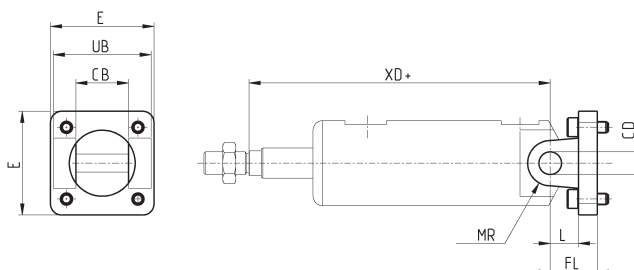

+ = add the stroke



DIMENSIONS									
Mod.	Ø	CB	CD	E	FL	L	MR	UB	XD+
C-H-90-32	32	26	10	45	22	12	10	45	142
C-H-90-40	40	28	12	55	25	15	12	52	160
C-H-90-50	50	32	12	65	27	17	12	60	170
C-H-90-63	63	40	16	75	32	20	16	70	190

Tight rear female trunnion bracket Mod. CR



Material: stainless steel 316

Supplied with:
1x female trunnion bracket
4x screws

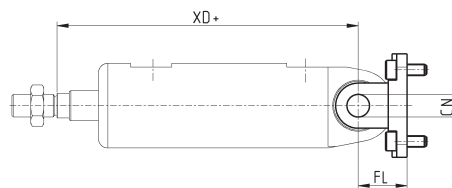

+ = add the stroke



DIMENSIONS							
Mod.	Ø	B1	B2	E	CN	FL	XD+
CR-90-32	32	14	34	45	10	22	142
CR-90-40	40	16	40	55	12	25	160
CR-90-50	50	21	45	65	16	27	170
CR-90-63	63	21	51	75	16	32	190

Male trunnion bracket with swivel ball joint Mod. R



Material: stainless steel 316

Supplied with:
1x male trunnion bracket
4x screws

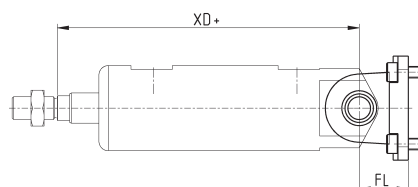

+ = add the stroke



DIMENSIONS						
Mod.	Ø	E	EN	FL	TG1	XD+
R-90-32	32	45	14	22	32.5	142
R-90-40	40	55	16	25	38	160
R-90-50	50	65	21	27	46.5	170
R-90-63	63	75	21	32	56.5	190

90° male trunnion bracket with swivel ball joint Mod. ZCR



Material: stainless steel 316


Supplied with:
1x male trunnion bracket
4x screws

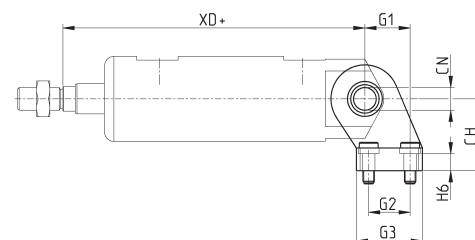


+ = add the stroke

DIMENSIONS											
Mod.	Ø	CH	CN	G1	G2	G3	H6	K1	K2	S5	XD+
ZCR-90-32	32	32	10	21	18	31	10	38	51	6.6	142
ZCR-90-40	40	36	12	24	22	35	10	41	54	6.6	160
ZCR-90-50	50	45	16	33	30	45	12	50	65	9	170
ZCR-90-63	63	50	16	37	35	50	12	52	67	14	190

Rod fork end Mod. G-90



ISO 8140
Material: stainless steel 303




DIMENSIONS										
Mod.	Ø	ØCK	LE	CM	CL	ER	CE	KK	B	ØB1
G-90-25-32	32	10	20	10	20	12	40	M10x1.25	26	18
G-90-40	40	12	24	12	24	14	48	M12x1.25	31	20
G-90-50-63	50-63	16	32	16	32	19	64	M16x1.5	39	26

Swivel ball joint Mod. GA-90



ISO 8139
Materials:
- stainless steel 304 bracket
- stainless steel 420 spherical ring
- sintered bronze bushing




DIMENSIONS											
Mod.	Ø	ØCN	U	EN	ER	AX	CE	KK	ØT	Z	SW
GA-90-32	32	10	10.5	14	14	20	43	M10x1.25	15	6.5	17
GA-90-40	40	12	12	16	16	22	50	M12x1.25	17.5	6.5	19
GA-90-50-63	50-63	16	15	21	21	28	64	M16x1.5	22	7.5	22

Piston rod lock nut Mod. U-90



ISO 4035
Material: stainless steel 304




DIMENSIONS				
Mod.	Ø	D	m	SW
U-90-25-32	32	M10x1.25	6	17
U-90-40	40	M12x1.25	7	19
U-90-63	50-63	M16x1.5	8	24

Nose nut Mod. V-97



Material: stainless steel 304

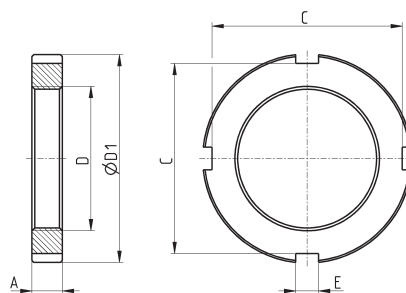


DIMENSIONS						
Mod.	Ø	A	D	ØD1	E	C
V-97-32	32	7	M30x1.5	42	5	38
V-97-40	40	8	M38x1.5	55	6	50
V-97-50-63	50-63	10	M45x1.5	60	6	53

Clevis pin Mod. S-90



Supplied with:
1x clevis pin in stainless steel 303
2x seeger in steel




DIMENSIONS						
Mod.	Ø	Ød	L	L1	L2	L3
S-90-32	32	10	53	46	1.1	3
S-90-40	40	12	60	53	1.1	3
S-90-50	50	12	68	61	1.1	3
S-90-63	63	16	78	71	1.1	3

Clevis pin Mod. S-97



Supplied with:
1x clevis pin in stainless steel 303
2x cotter pin in steel




DIMENSIONS						
Mod.	Ø	Ød	L	L1	L2	L3
S-90-32	32	10	53	46	1.1	3
S-90-40	40	12	60	53	1.1	3
S-90-50	50	12	68	61	1.1	3
S-90-63	63	16	78	71	1.1	3

Antirotating clevis pin Mod. SR-90



Supplied with:
1x antirotating clevis pin
in stainless steel 316
1x seeger in steel

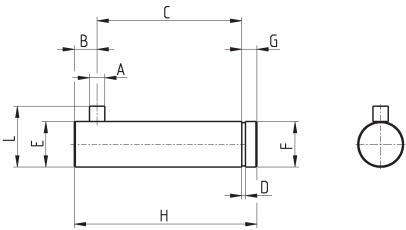

DIMENSIONS										
Mod.	Ø	A	B	C	D	E	F	G	H	L
SR-90-32	32	3	4.5	32.5	1.1	10	9.6	4	41	14
SR-90-40	40	4	6	38	1.1	12	11.5	4	48	16
SR-90-50	50	4	6	43	1.1	16	15.2	5	54	20
SR-90-63	63	4	6	49	1.1	16	15.2	5	60	20